

Opus Floors Canada
Creating Inspirational Flooring

High Density Underlay

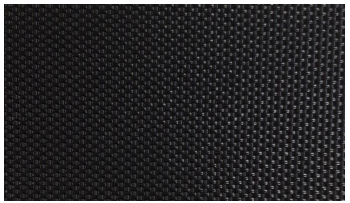


Name	High Density Underlay
Density	150kg/m3
Size	3'7" wide x 55'5" long / roll
	1.1m wide x 16.9m long / roll
Qty	200 sqft/roll
Feature	1.5mm high density underlay with black 0.1mm polyethylene film moisture barrier

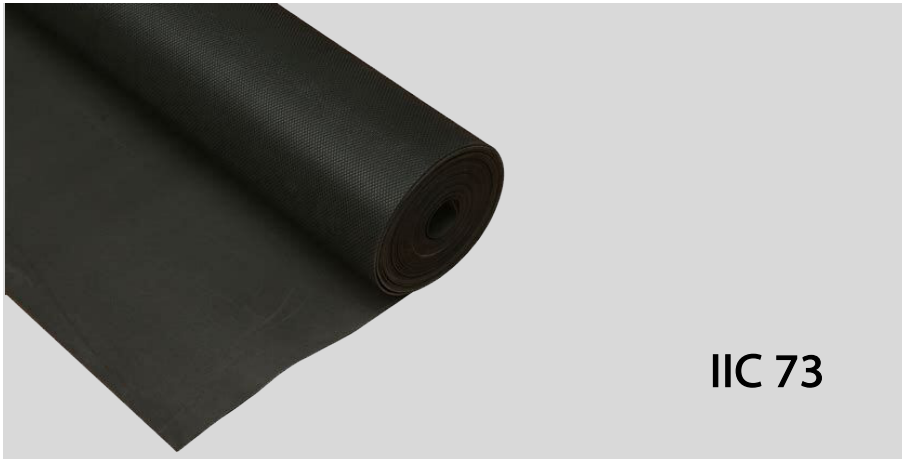


Superior Compression Strength


Excellent Thermal Insulation


Excellent Impact Sound Insulation


Corrects Minor Subfloor Imperfection and Cracks


Excellent Reflected Walking Sound Reduction


Moisture and Vapor Proof

- Advanced Moisture Block Technology
- Reduces Noise Level
- Protective Cushion
- For Use under Opus **Engineered Wood/ Laminate/LVT/WPC/SPC** 4mm or Thicker
- Resilient-Maintains Original Structure
- Easy to Install
- Longlife Technology: Underlayment features anti-bacterial, mold, and mildew resistance ensuring a longlife for your floor

The specifications being presented are being provided from the information provided in the IIC sound rating document. IIC ratings are obtained by testing with the floor assembly built in conjunction with the manufacturer. Sound ratings can and will vary depending on the specific type of floor construction (concrete slabs versus wood substrate), ceiling construction, and other material details on each job site. If more detailed information is required, please contact your Opus representative.